


Construction: GRP/Foam Sandwich




Main Sail = 21.75 m²
Genoa = 13.05 m²
Gennaker = 30 m²
I = 9.10 m
J = 2.9 m
P = 9.00 m
E = 3.30 m

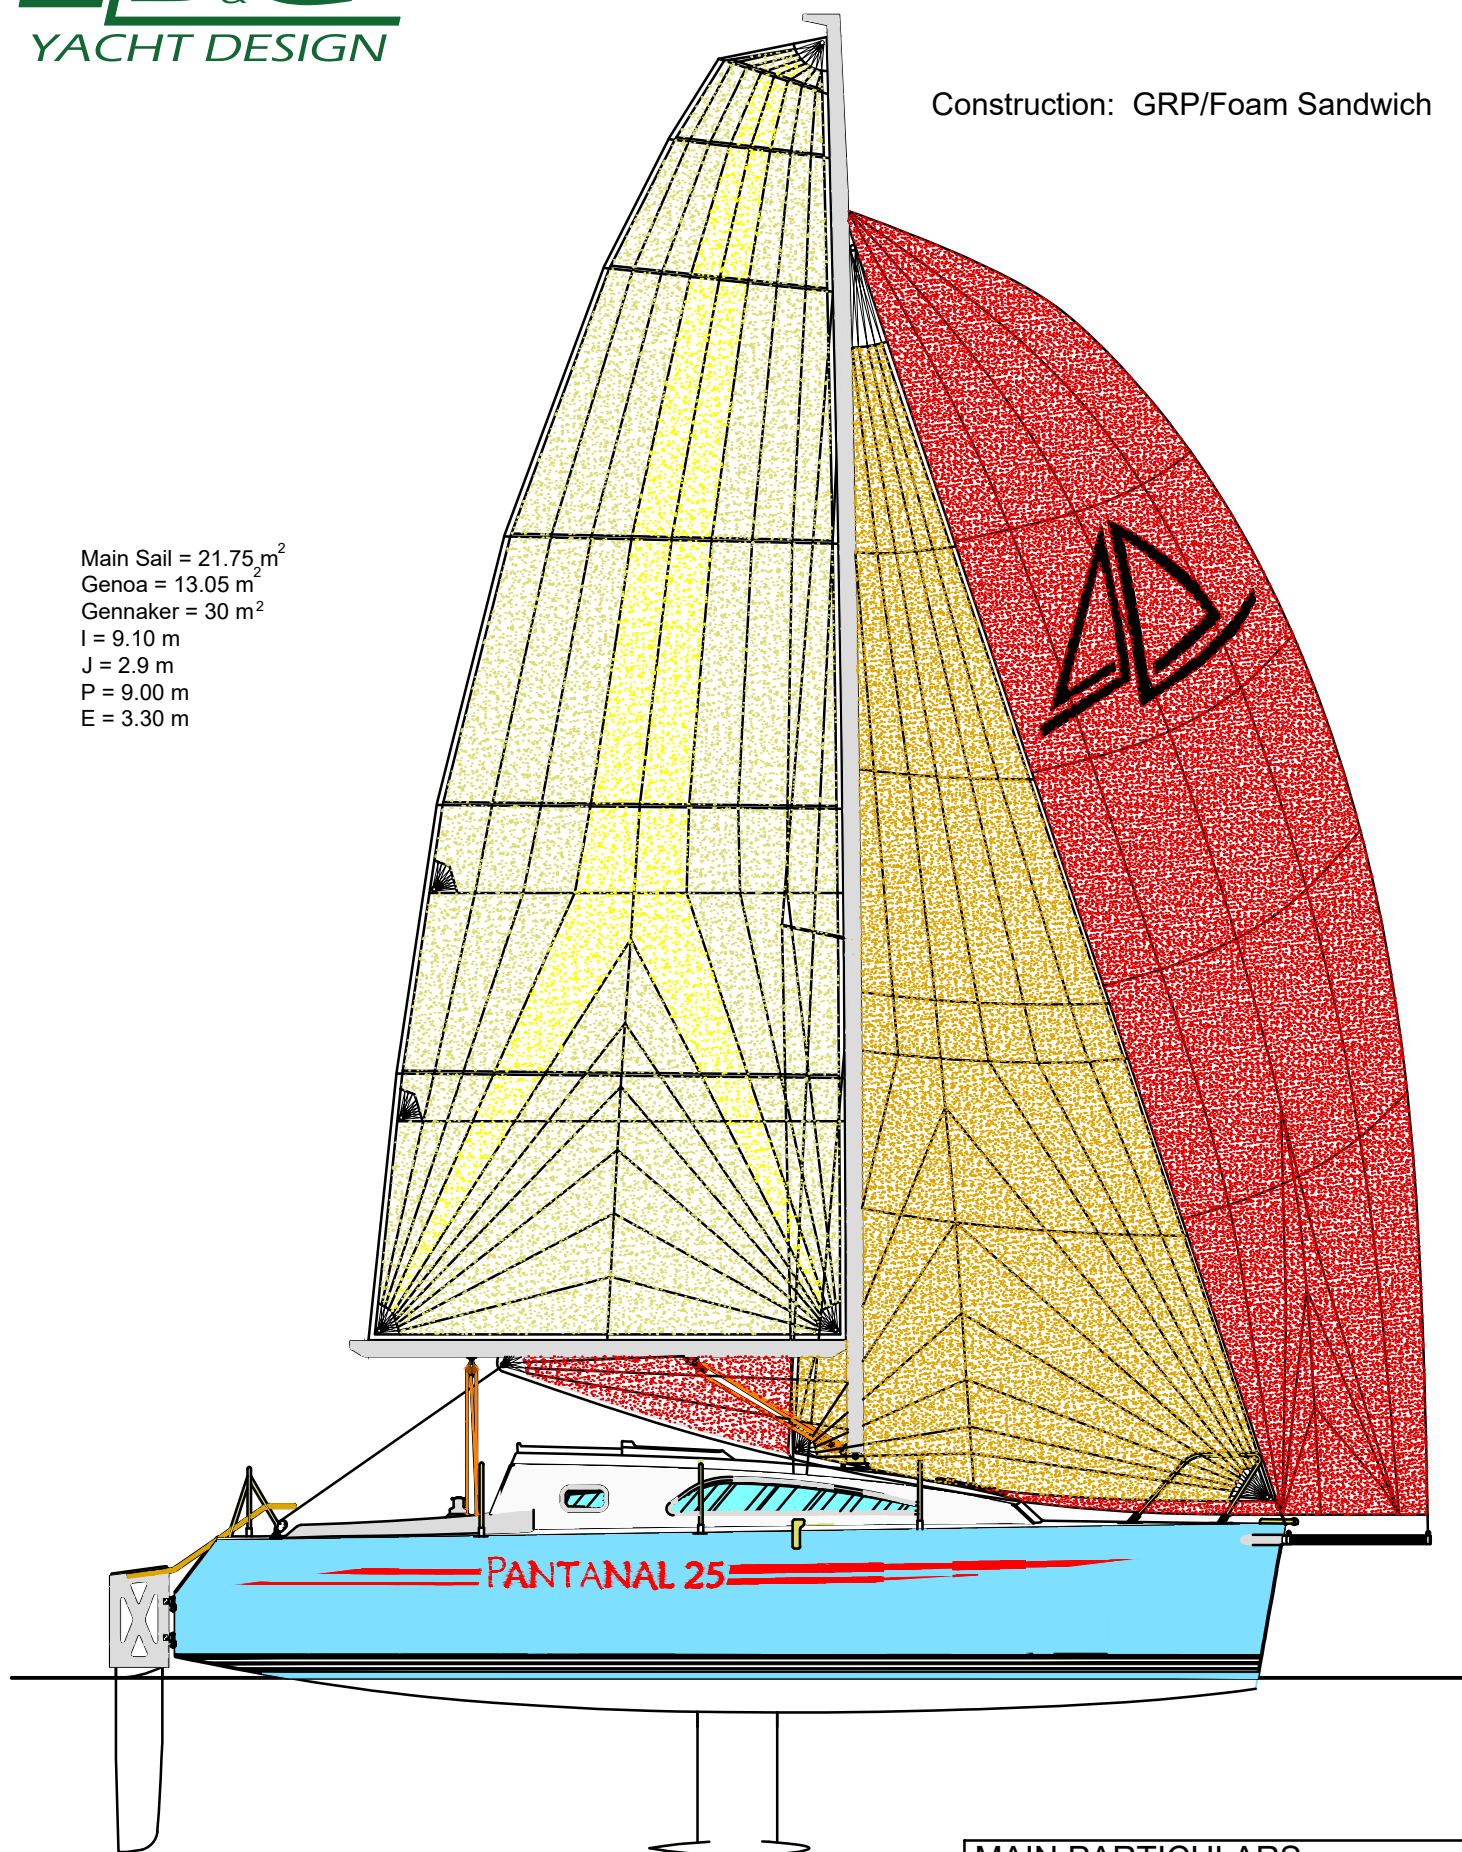

MAIN PARTICULARS:

LOA = 7.65 m
LWL = 6.66 m
BREADTH = 2.44m

Min. Draught = 0.63 m
Max. Draught = 1.65 m
Displacement = 1300 kg
Ballast = 450 kg

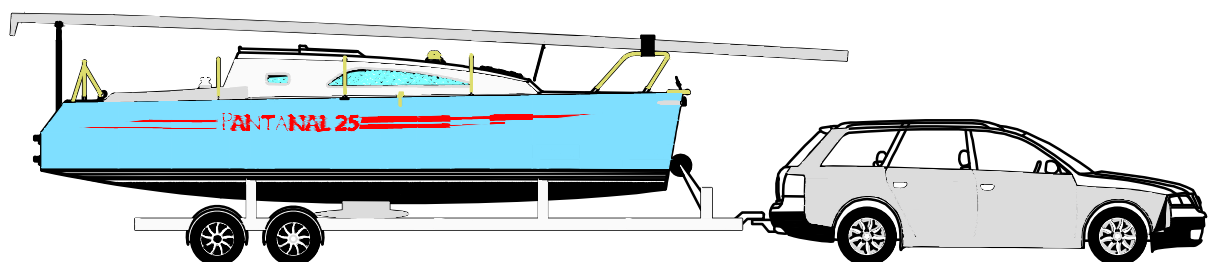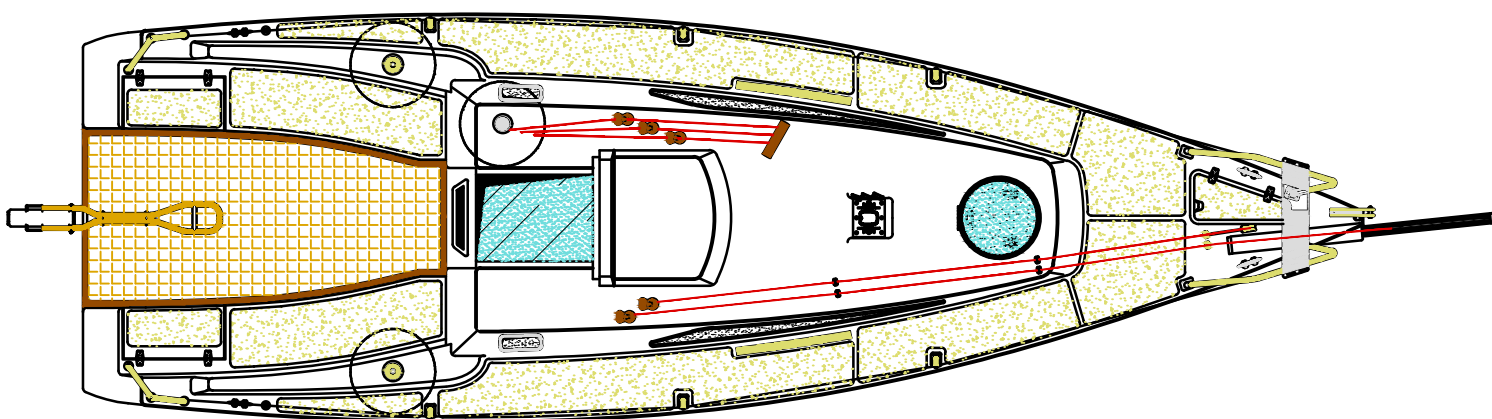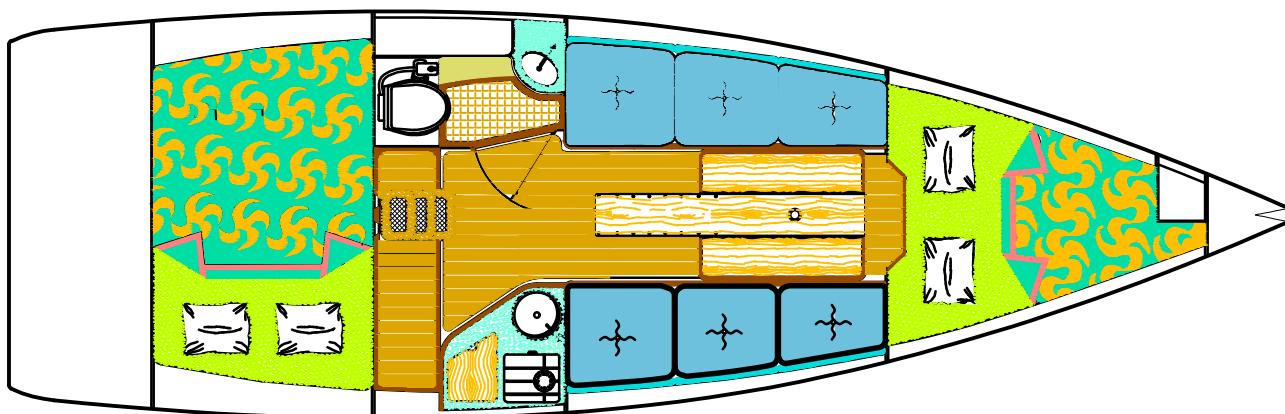

Construction: GRP/Foam Sandwich

MAIN PARTICULARS:

LOA = 7.65 m
LWL = 6.66 m
BREADTH = 2.44m

Min. Draught = 0.63 m
Max. Draught = 1.65 m
Displacement = 1300 kg
Ballast = 450 kg

Pantanal 25

Speed Polar Diagram

TECHNICAL DATA

LOA = 7.65 m (25.1 ft)
 LWL = 6.66 m (22.1 ft)
 Beam = 2.44m (8.0 ft)
 Min. Draught = 0.63 m (2.1 ft)
 Max. Draught = 1.63m (5.35 ft)
 Displ. (light) = 1300 kg (2870 lbs)
 Ballast = 450 kg (992 lbs)
 Rig Type - Fractional Sloop

Mainsail Area = 21.75 m² (234 ft²)
 Genoa Area = 13.05 m² (140 ft²)
 Gennaker Area = 30 m² (320 ft²)

IG = 9.10 m (29.9 ft)
 J = 2.90 m (9.5 ft)
 P = 9.00 m (29.5 ft)
 E = 3.30 m (10.8 ft)
 ISP = 9.20 m (30.8 ft)
 TPS = 3.61 m (11.8 ft)

Engine: 9hp - 15hp outboard

Construction: GRP/Foam Sandwich

